Gigabit Ethernet to HDMI® Adapter

User's Manual

ABOUT THIS MANUAL

This manual is designed for use with the Gigabit Ethernet to HDMI® Adapter. Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. The manufacturer does not make any representations or warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any commercial damage, including but not limited to special, incidental, consequential, or other damage.

SAFETY INSTRUCTIONS

Always read the safety instructions carefully:

- Keep this User's Manual for future reference
- Keep this equipment away from humidity
- If any of the following situation arises, get the equipment checked by a service technician:
  - The equipment has been exposed to moisture.
  - The equipment has been dropped and damaged.
  - The equipment has obvious sign of breakage.
  - The equipment has not been working well or you cannot get it to work according to the User's Manual.

COPYRIGHT

This document contains proprietary information protected by copyright. All right are reserved. No part of this manual may be reproduced by any mechanical, electronic or other means, in any form, without prior written permission of the manufacturer.

TRADEMARKS

All trademarks and registered trademarks are the property of their respective owners or companies.

Table of Contents

1. Introduction 1

Features 2
Package Contents 2
System Requirements 2
LED Status 2

2. Installation 3

Hardware Connection 3
Driver Installation 4
On Windows® XP 4
On Windows Vista®/ Windows® 7 11

3. Application 16

File 16
Options 16
View 22
Help 23

4. Display Mode 25

5. Uninstall the Driver 27

6. Specifications 31

7. Regulatory Compliance 32

FCC Conditions 32
CE 32
WEEE Information 32

1. Introduction

The Gigabit Ethernet to HDMI® Adapter enables you easily to connect monitor and projector from a computer. You may perform a high quality presentation and DVD video by the high throughput of Gigabit Ethernet and have the content of your PC get access remotely. The display station can be up 100 meters away from your computer with CAT6 cable. You can connect to 6 different display screens with this adapter as digital signage application.

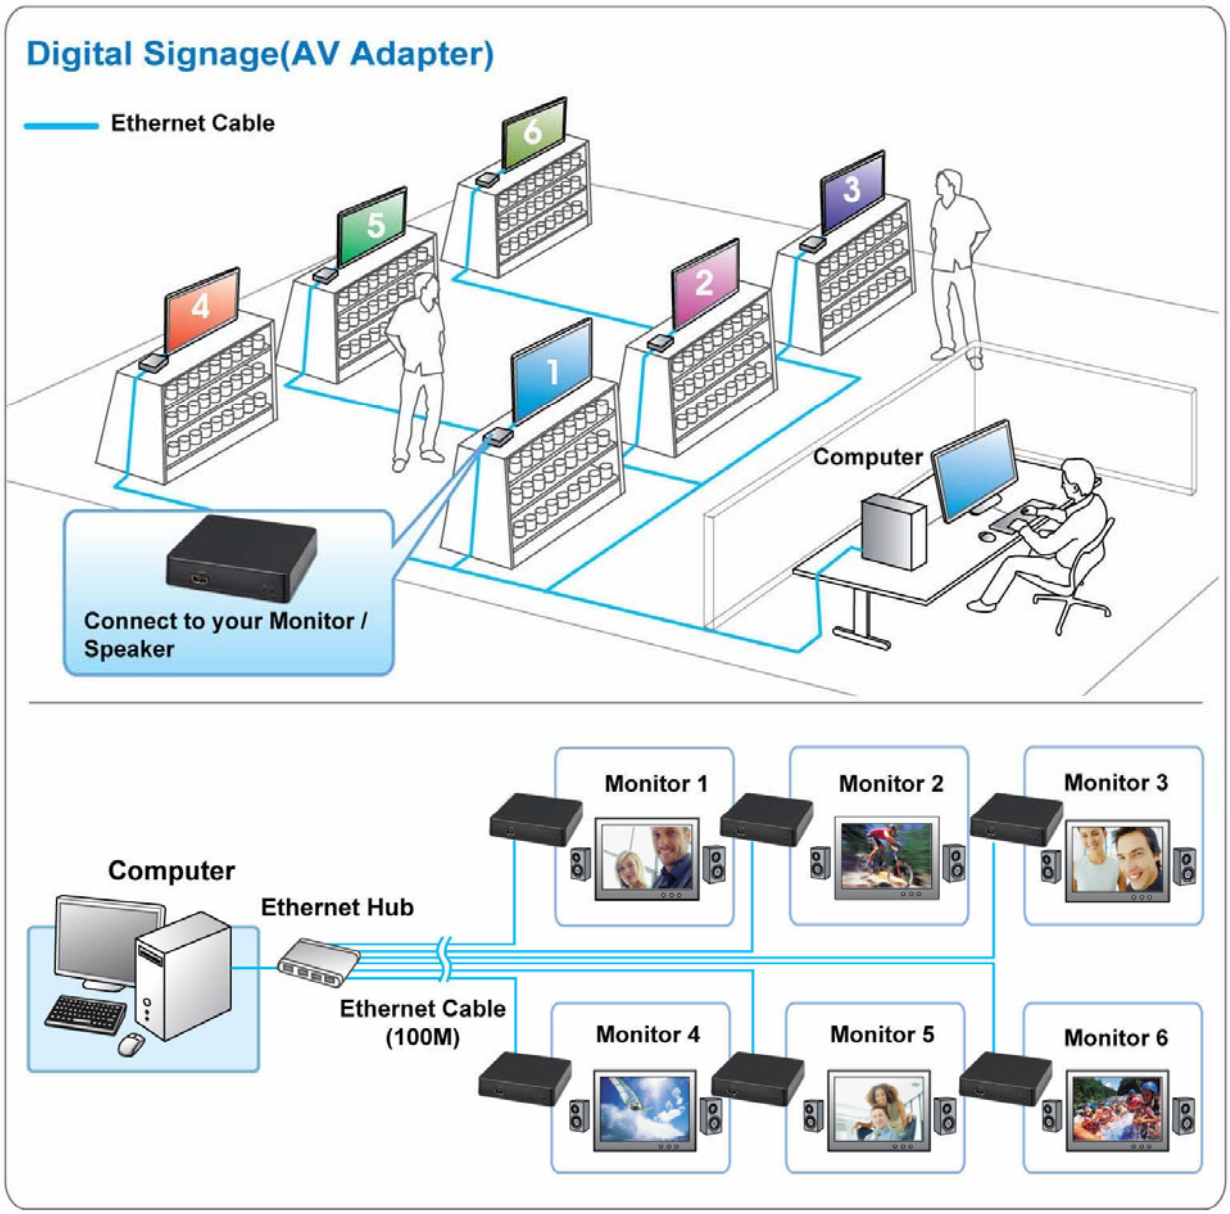

Features

- Support connect up to 6 display screens as digital signage function
- Compatible with Gigabit Ethernet specification
- Video application on LCD monitor or projector shared through Gigabit Ethernet port
- Display remote control
- Compatible with USB 1.1/2.0 specification
- Support resolution up to 1080P
- Input: Gigabit Ethernet interface；Output: HDMI® interface
- Long transmission distance up to 100 meters
- Plug and Play

Package Contents

- Gigabit Ethernet to HDMI® Adapter x1
- Power Adapter x1
- CD (Driver and User's Manual) x1
- Quick Installation Guide x1

Operating System Requirements

- Windows® XP, Windows Vista® 32/64 bit and Windows® 7 32/64 bit.

LED Status

LED	Color	Description
Power	Green	On for connected to the power adapter Off for not connected to the power adapter
Link	Blue	LAN activity. Blinking when there is data flow between LAN and the host computer

2. Installation

Hardware Connection

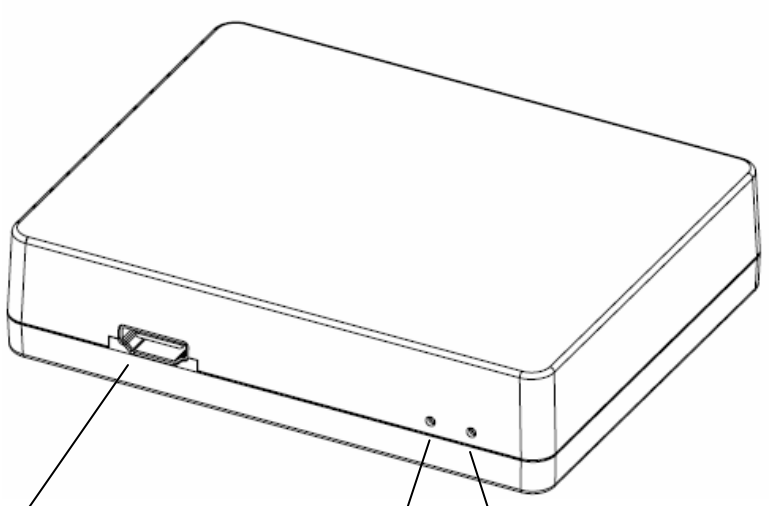

Connect to HDMI® monitor / projector

LINK (LAN Connection) Indicator

Power Indicator

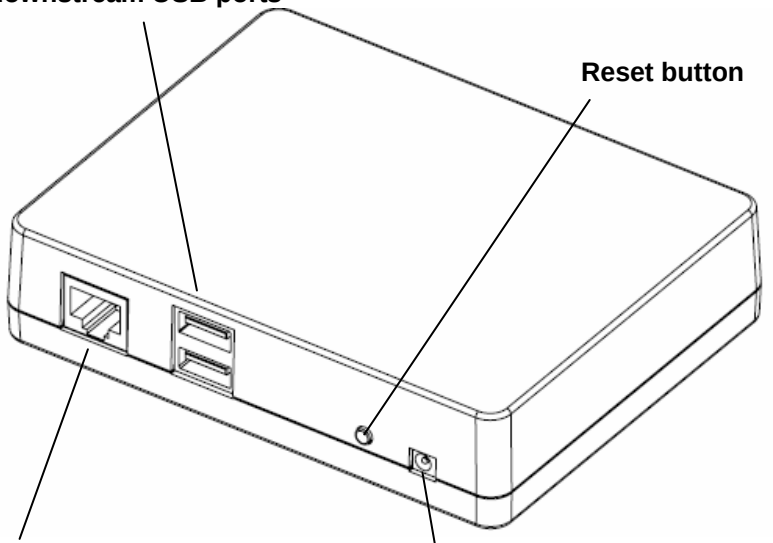

2 downstream USB ports

Reset button

Connect to the Ethernet with RJ45 cable

(LAN Port)

Connect to the power adapter

Driver Installation

On Windows® XP

Caution: DO NOT connect the adapter to your computer before installing the driver on the provided CD.

1. Insert the provided CD into your disc drive. It is normal that the screen will flick black a couple of times during the installation. When finished, the installation screen will disappear, and you can see the screen as below.

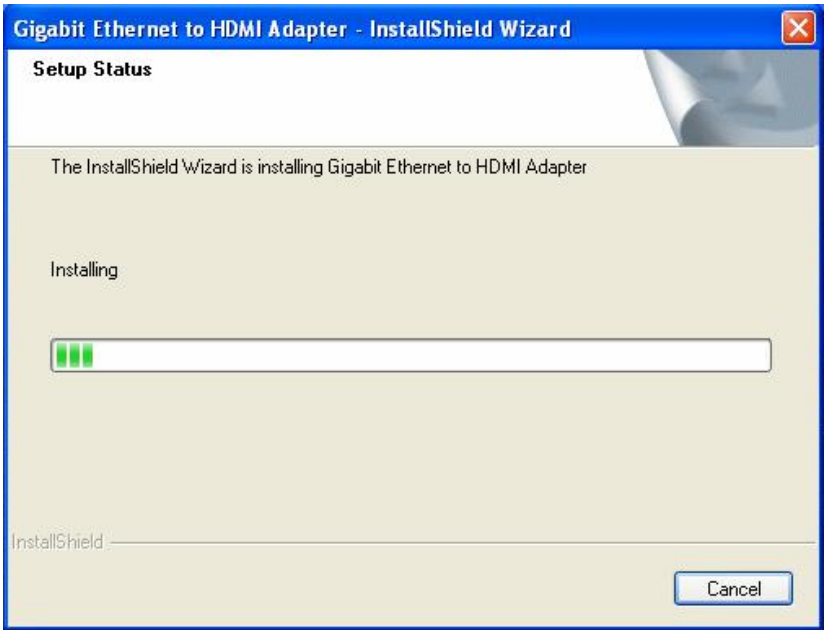

2. When the **Install DisplayLink Software** screen appears, select **I accept** the terms in the license agreement.

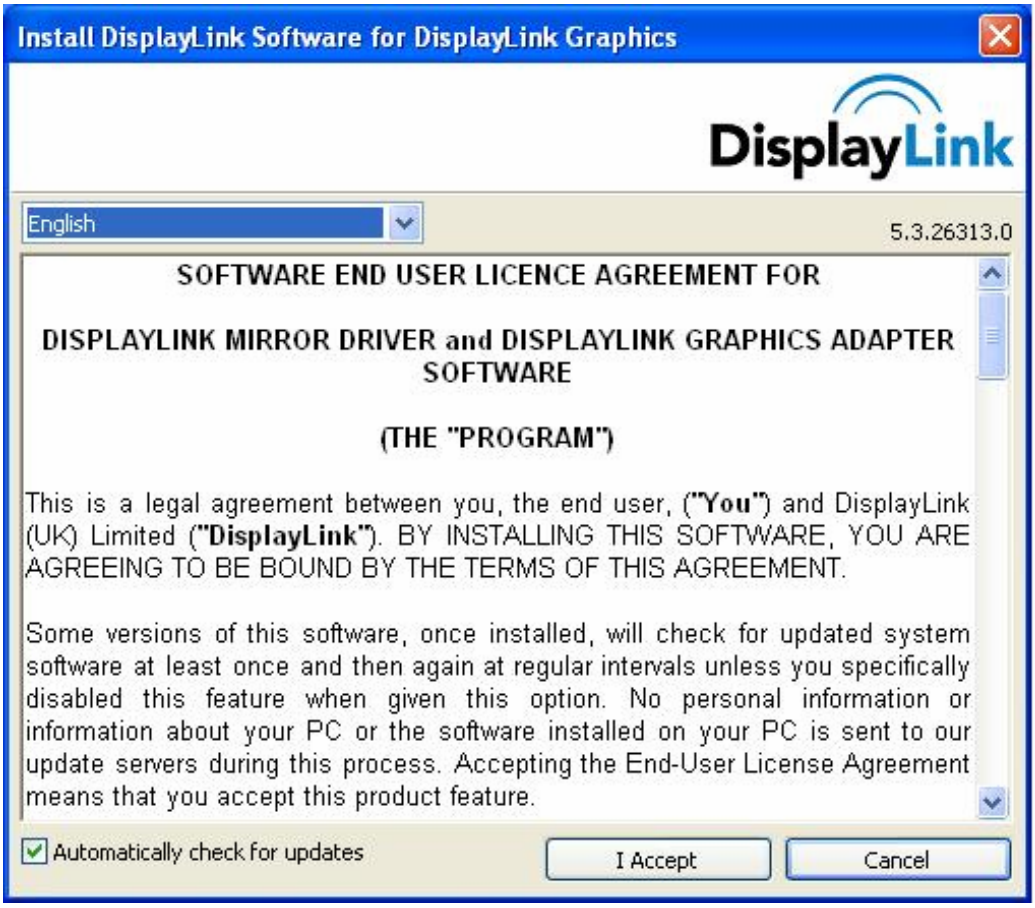
Install DisplayLink Software for DisplayLink Graphics
DisplayLink
English
5.3.26313.0
SOFTWARE END USER LICENCE AGREEMENT FOR
DISPLAYLINK MIRROR DRIVER and DISPLAYLINK GRAPHICS ADAPTER SOFTWARE
(THE "PROGRAM")
This is a legal agreement between you, the end user, ("You") and DisplayLink (UK) Limited ("DisplayLink"). BY INSTALLING THIS SOFTWARE, YOU ARE AGREEING TO BE BOUND BY THE TERMS OF THIS AGREEMENT.
Some versions of this software, once installed, will check for updated system software at least once and then again at regular intervals unless you specifically disabled this feature when given this option. No personal information or information about your PC or the software installed on your PC is sent to our update servers during this process. Accepting the End-User License Agreement means that you accept this product feature.
Automatically check for updates
I Accept
Cancel

3. Please wait while Windows configures DisplayLink Core Software. Your screens may temporarily go black or flash during this process.

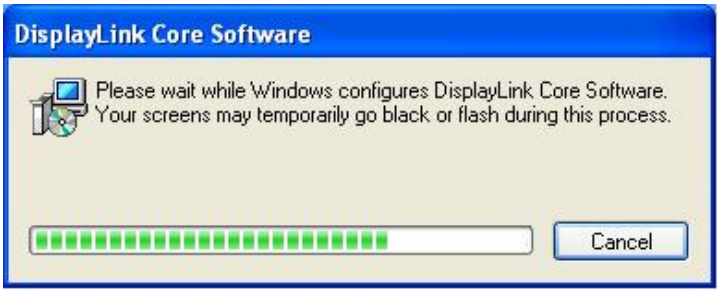
DisplayLink Core Software
Please wait while Windows configures DisplayLink Core Software.
Your screens may temporarily go black or flash during this process.
Cancel

4. After the DisplayLink software was installed, the **USB PnP Sound Device** installation will appear.

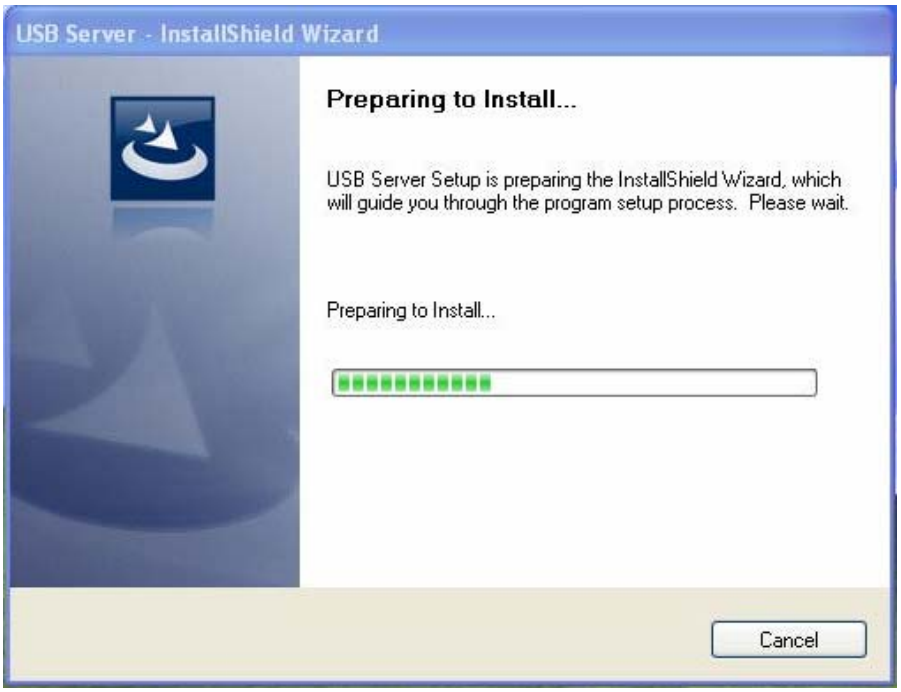
USB Server - InstallShield Wizard
Preparing to Install...
USB Server Setup is preparing the InstallShield Wizard, which will guide you through the program setup process. Please wait.
Preparing to Install...
Cancel

Note: The Software Installation Window may appear, please click **Continue Anyway**.

5. Setup has finished installing USB Server on your computer, please click **Finish** .

6. The InstallShield Wizard has successfully installed USB Server. Before you can use the program, you must restart your computer. Please click "**Yes, I want to restart my computer now**" and click **Finish**.

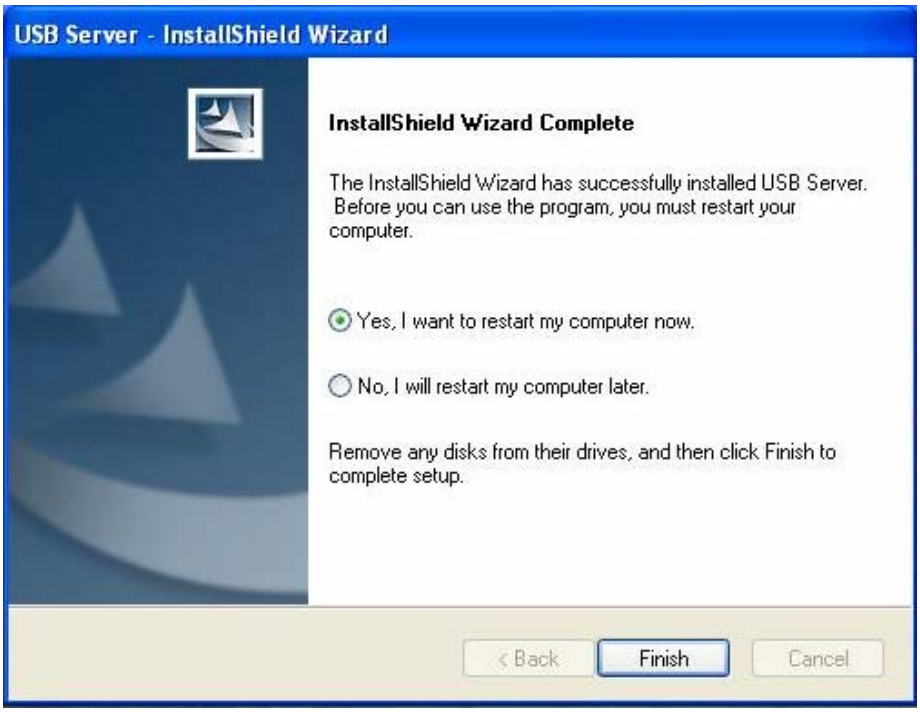
USB Server - InstallShield Wizard
InstallShield Wizard Complete
The InstallShield Wizard has successfully installed USB Server. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Remove any disks from their drives, and then click Finish to complete setup.
< Back
Finish
Cancel

7. Please plug power cable into Gigabit Ethernet to HDMI® Adapter and connect the LAN port of the Ethernet adapter end to a free Router.

   After restart the OS, the **Windows Security Window** may appear when making connection. Please click "**Unblock**" button to make connection.

8. Please Double-click the shortcut icon of **Launch USB Server** on the desktop.

9. The Found New Hardware Wizard Window will appear, please choose" **Yes, this time only**" and click **Next**.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
Windows will search for current and updated software by looking on your computer, on the hardware installation CD, or on the Windows Update Web site (with your permission).
Read our privacy policy
Can Windows connect to Windows Update to search for software?
Yes, this time only
Yes, now and every time I connect a device
No, not this time
Click Next to continue.
< Back
Next >
Cancel

10. Please choose "**Install the software automatically**" and click **Next**.

Found New Hardware Wizard
This wizard helps you install software for:
Network USB Server Device XP
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

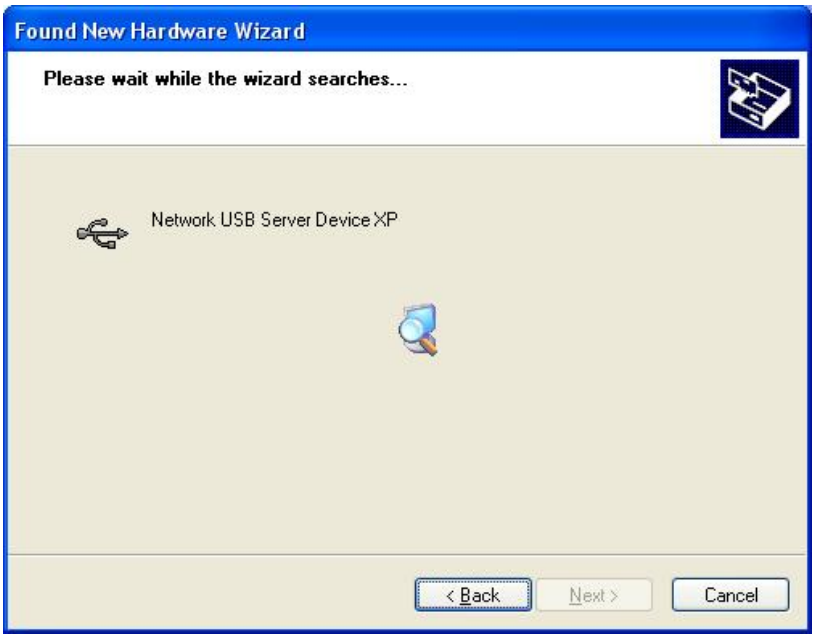

11. Please click **Finish** to close the wizard.

Found New Hardware Wizard
Completing the Found New Hardware Wizard
The wizard has finished installing the software for:
Network USB Server Device XP
Click Finish to close the wizard.
< Back
Finish
Cancel

12. Please click "**Connect Device**" when a device is selected.

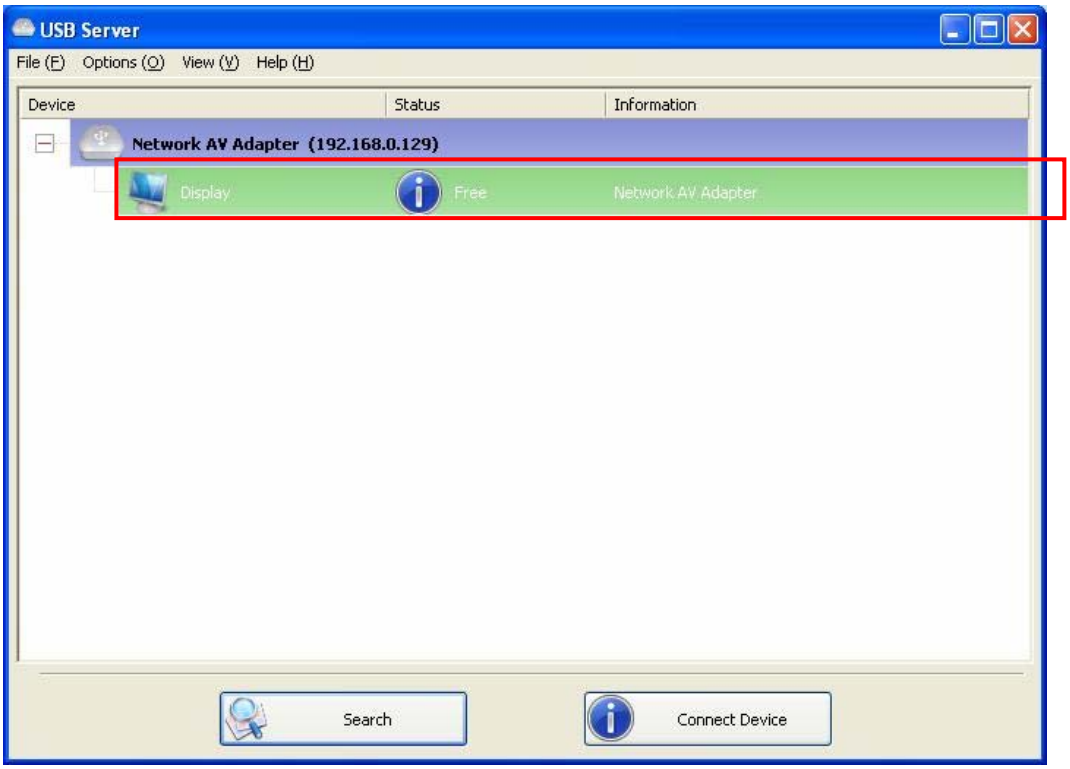

13. When the device is connected, the check mark will be green.

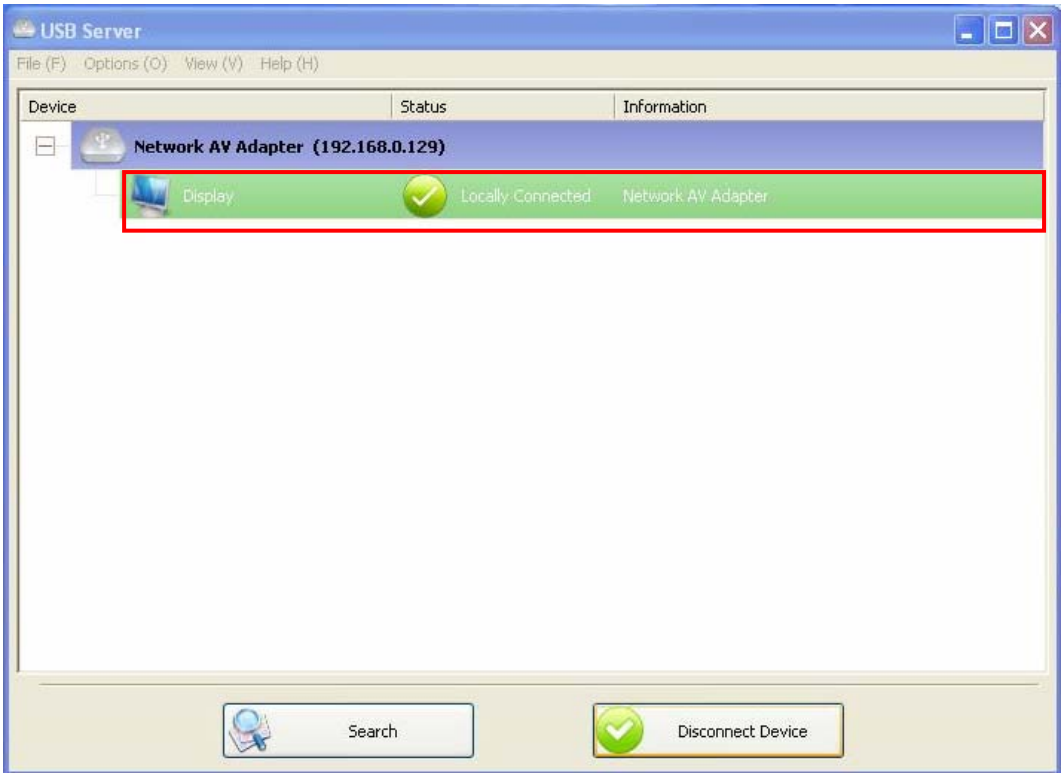

14. When the System Settings Changes Dialog Box appear, please click "**Yes**" button to take the new settings effect.

*Actual strings depend on your operation system. These screen shots are from Windows® XP and might vary slightly for each operation system.

On Windows Vista® / Windows® 7

Caution: DO NOT connect the adapter to your computer before installing the driver on the provided CD.

1. Insert the provided CD into your disc drive. Locate and double-click the **Run autorun.exe** file in the **Driver** folder to launch the setup program.

AutoPlay
DVD RW Drive (E:) Driver
Always do this for software and games:
Install or run program from your media
Run Setup.exe
Publisher not specified
General options
Open folder to view files
using Windows Explorer
View more AutoPlay options in Control Panel

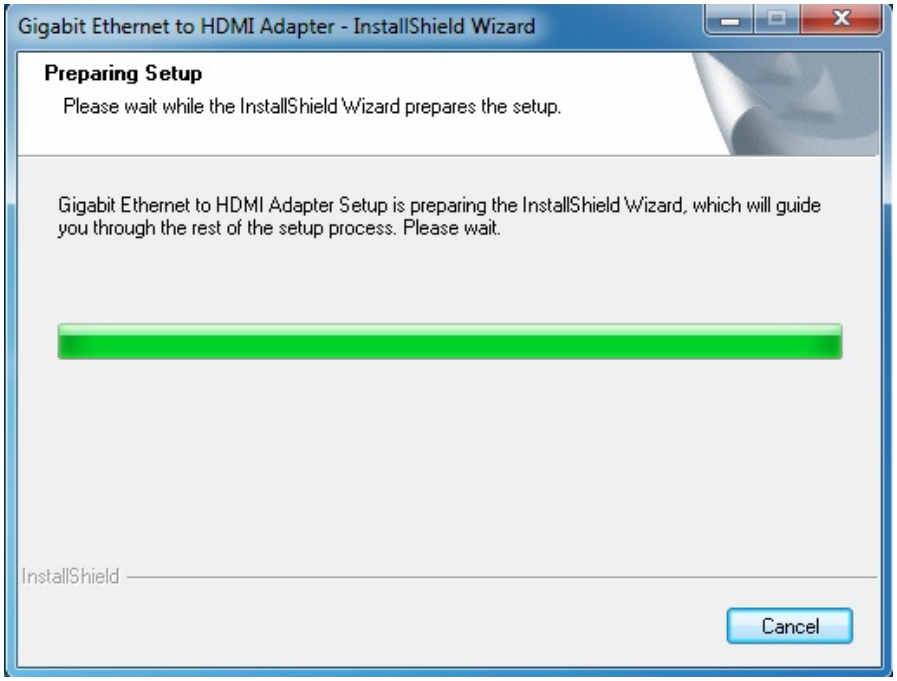
Gigabit Ethernet to HDMI Adapter - InstallShield Wizard
Preparing Setup
Please wait while the InstallShield Wizard prepares the setup.
Gigabit Ethernet to HDMI Adapter Setup is preparing the InstallShield Wizard, which will guide you through the rest of the setup process. Please wait.
InstallShield
Cancel

Note：

If the installer program doesn't run automatically, please locate and double-click on the **Setup.exe** file in the **Driver** folder to launch the setup program.

If you encounter a **User Account Control** dialog box when attempting to install a program, enter an administrator password or click **Allow/Yes** to start the installation.

2. Please choose "**No, I will restart my computer later**" and click **Finish**.

USB PnP Sound Device
Installation is complete. You must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Finish

3. When the **Install DisplayLink Software** screen appears, select **I accept** the terms in the license agreement.

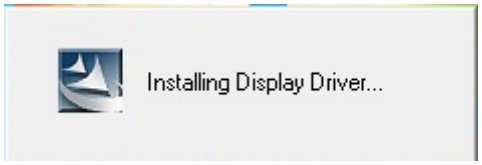

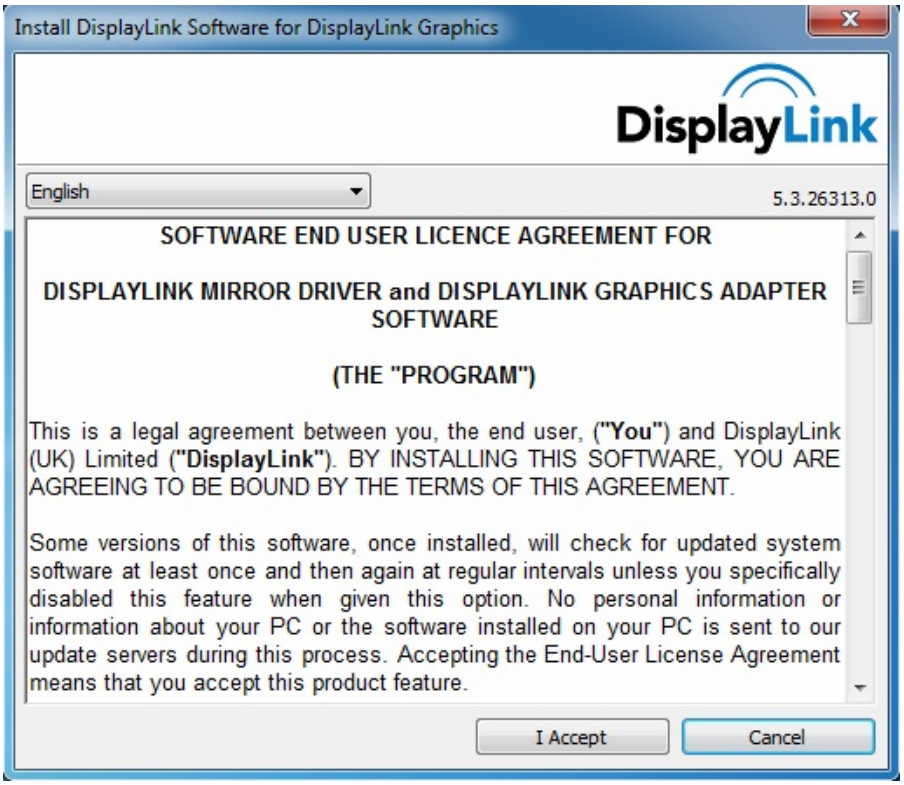
Install DisplayLink Software for DisplayLink Graphics
DisplayLink
English
5.3.26313.0
SOFTWARE END USER LICENCE AGREEMENT FOR
DISPLAYLINK MIRROR DRIVER and DISPLAYLINK GRAPHICS ADAPTER SOFTWARE
(THE "PROGRAM")
This is a legal agreement between you, the end user, ("You") and DisplayLink (UK) Limited ("DisplayLink"). BY INSTALLING THIS SOFTWARE, YOU ARE AGREEING TO BE BOUND BY THE TERMS OF THIS AGREEMENT.
Some versions of this software, once installed, will check for updated system software at least once and then again at regular intervals unless you specifically disabled this feature when given this option. No personal information or information about your PC or the software installed on your PC is sent to our update servers during this process. Accepting the End-User License Agreement means that you accept this product feature.
I Accept
Cancel

4. Please wait while Windows configures DisplayLink Graphics. Your screens may temporarily go black or flash during this process.

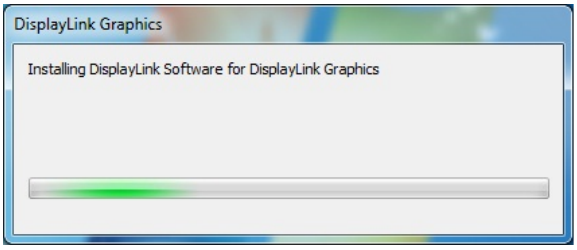

5. After DisplayLink software installed, the **USB Server Setup** installation will appear.

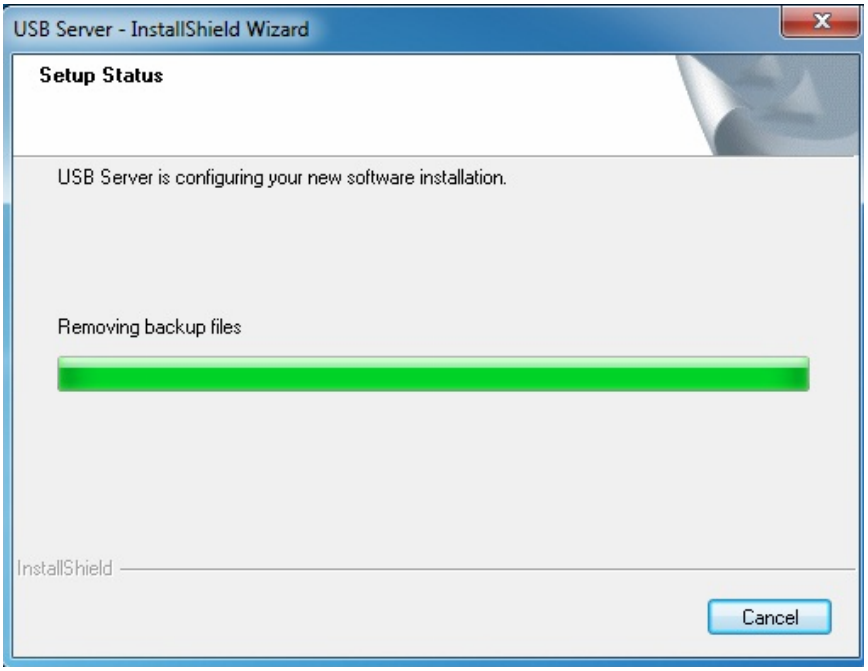

Note: The Window Security Windows will appear, please click **Install**.

6. Setup has finished installing USB Server on your computer. Please click **Finish**.

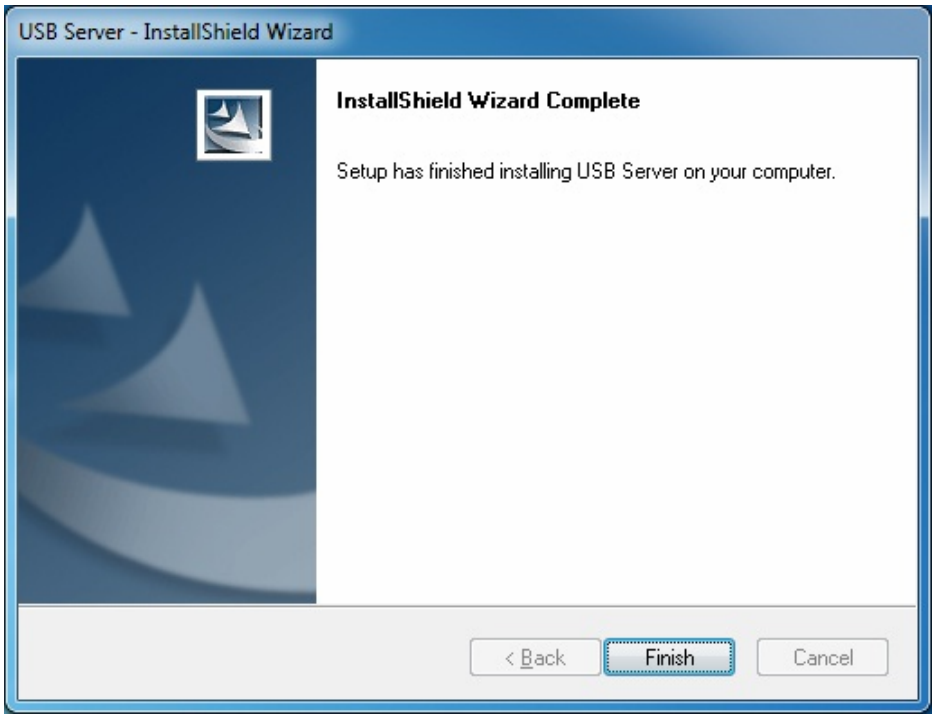

7. Please choose "**Yes, I want to restart my computer now**" and click **Finish**.

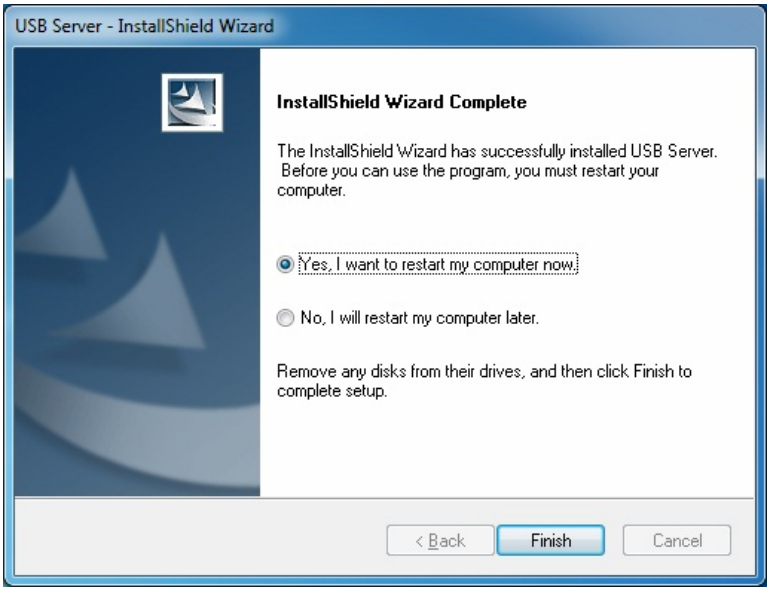
USB Server - InstallShield Wizard
InstallShield Wizard Complete
The InstallShield Wizard has successfully installed USB Server. Before you can use the program, you must restart your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Remove any disks from their drives, and then click Finish to complete setup.
< Back
Finish
Cancel

8. When the installation is completed. Please restart your system before using Gigabit Ethernet to HDMI®Adapter. You may see the **Launch USB Server** icon on desktop.

9. Please plug power cable into Gigabit Ethernet to HDMI®Adapter and **connect** the Ethernet adapter's LAN port end to a free Router.

   The **Windows Security Alert Window** will appear when making connection. Please click **Unblock** or **Allow Access** button to make connection.

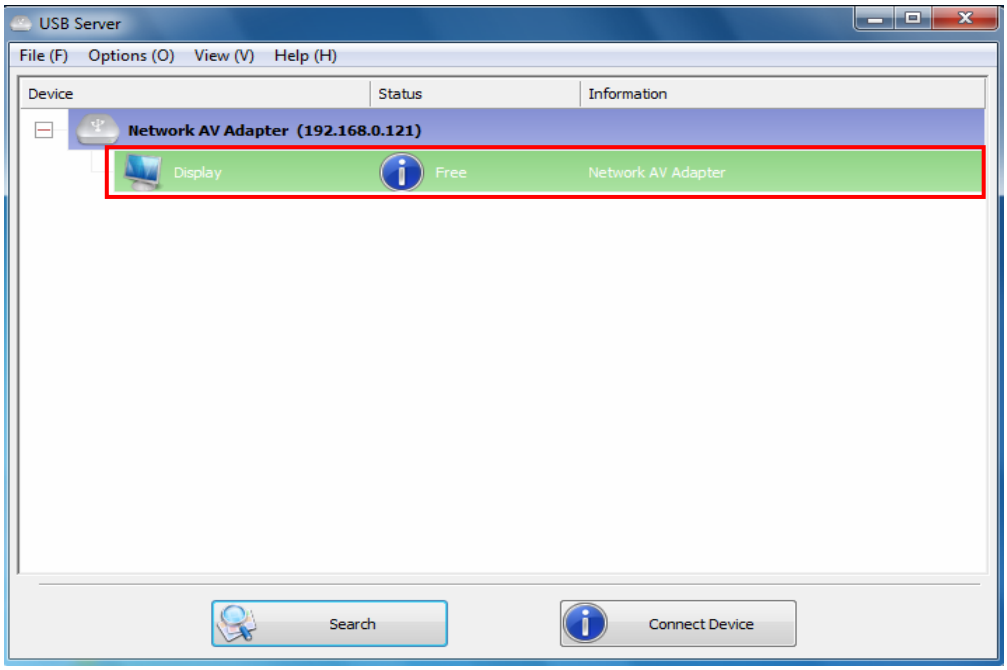

10. When the device is connected, the check mark will be green.

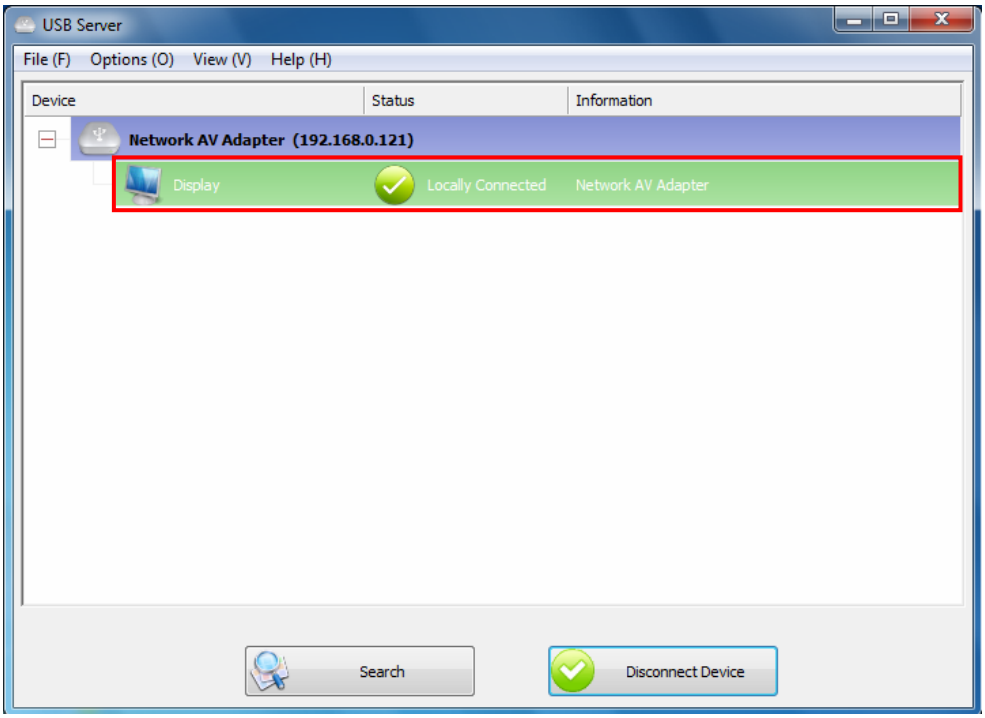

*Actual strings depend on your operation system. These screen shots are from Windows® 7 and might vary slightly for each operation system.

11. If your monitor is not yet connected to the adapter, make the connection and power on your monitor.

Application

■ File

The **Quit** function exits the program.

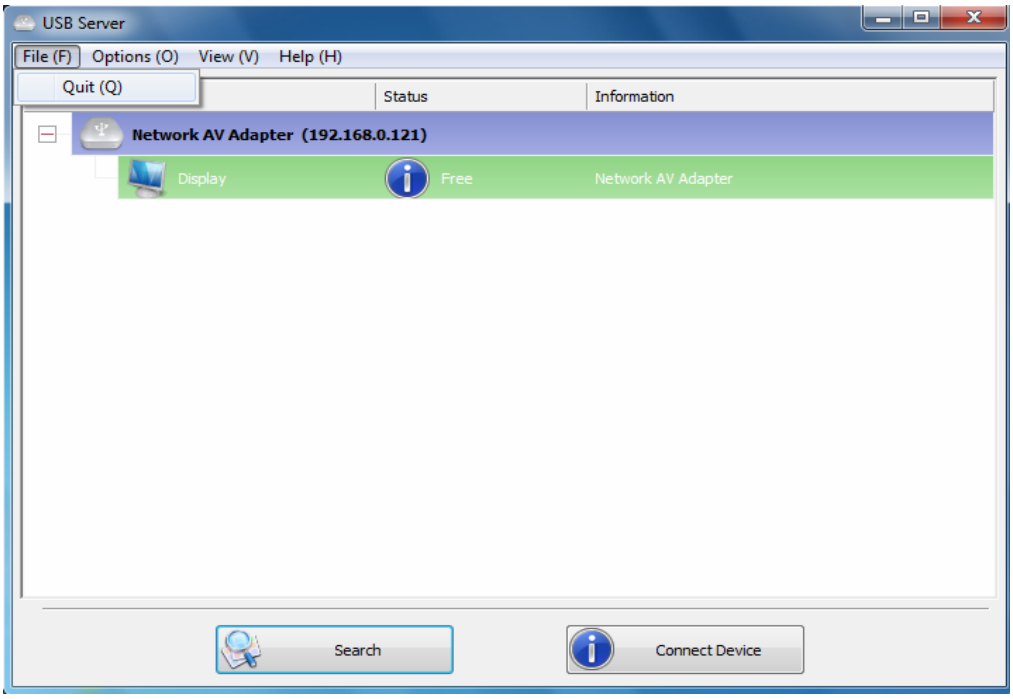

■ Options

1. **Language:** You can change the utility's language with this option. The default language would be the same as your system's language.

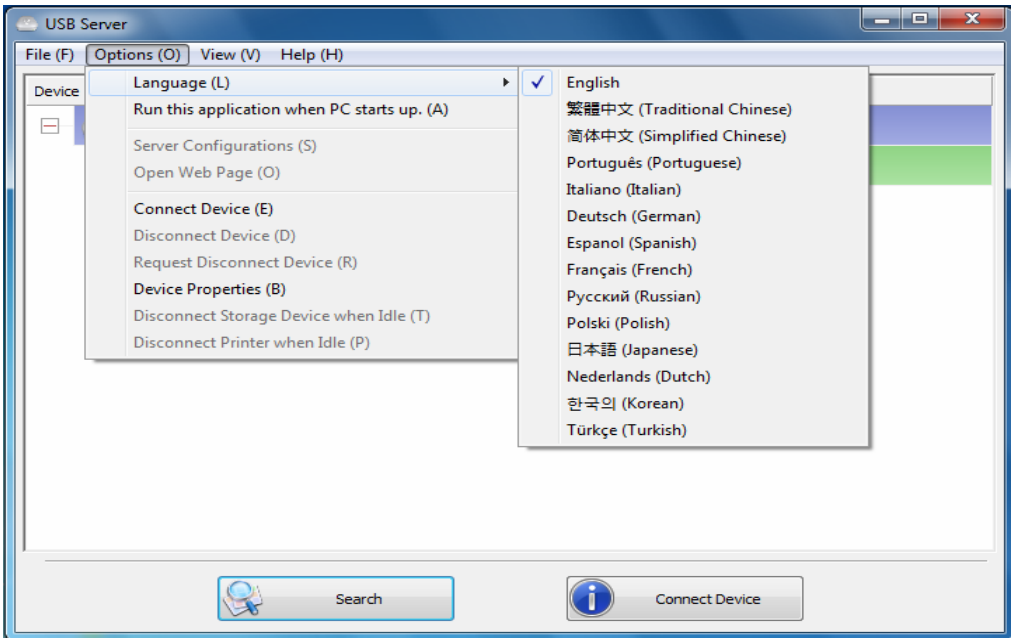

2. **Server Configuration**: There are two way to bring up Server Configuration. You can go through **Options Tab** (figure 1) or Right-Click on the server icon to bring up this menu, and select **Server Configuration** (figure 2).

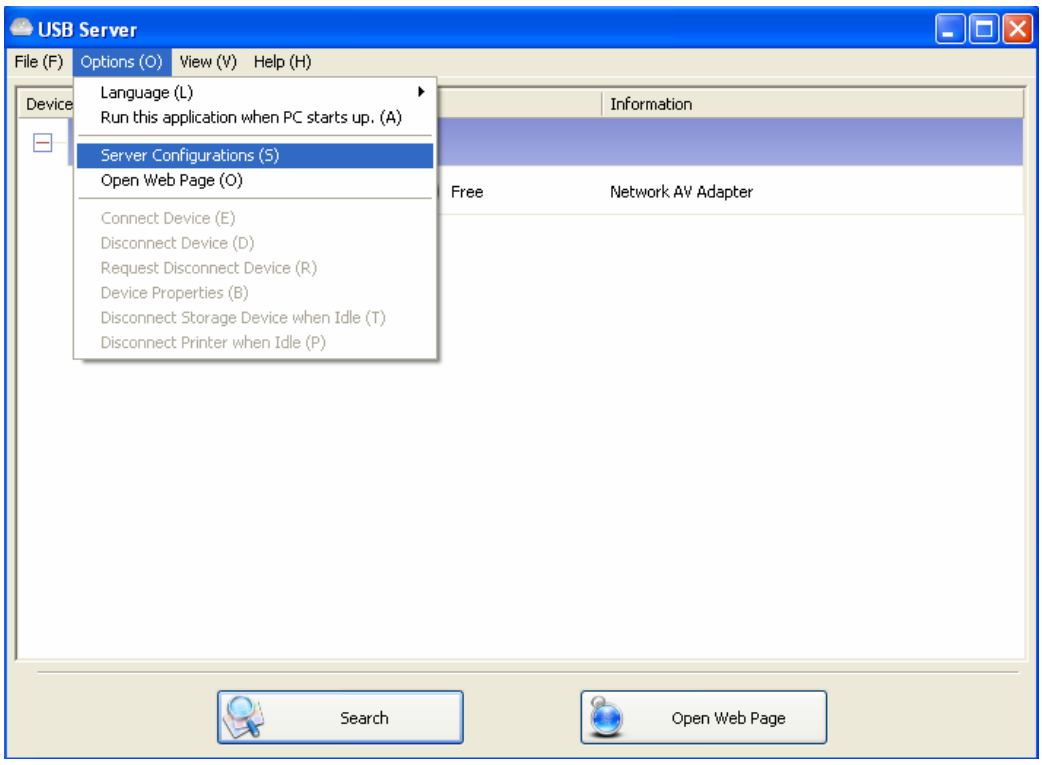

(Figure 1)

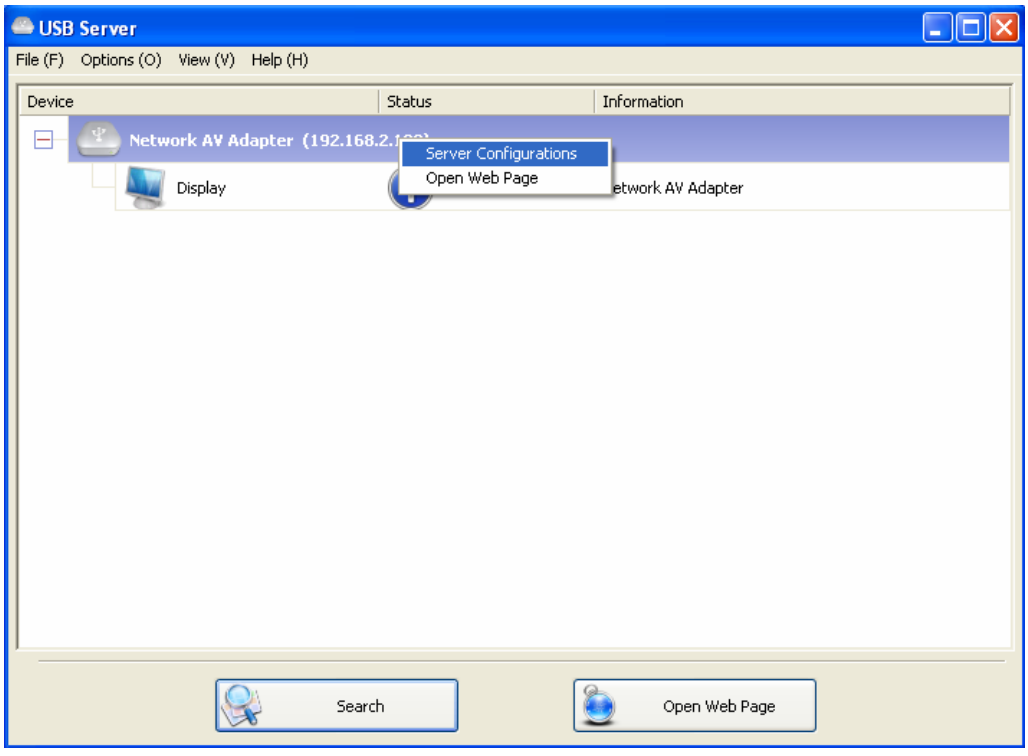

(Figure 2)

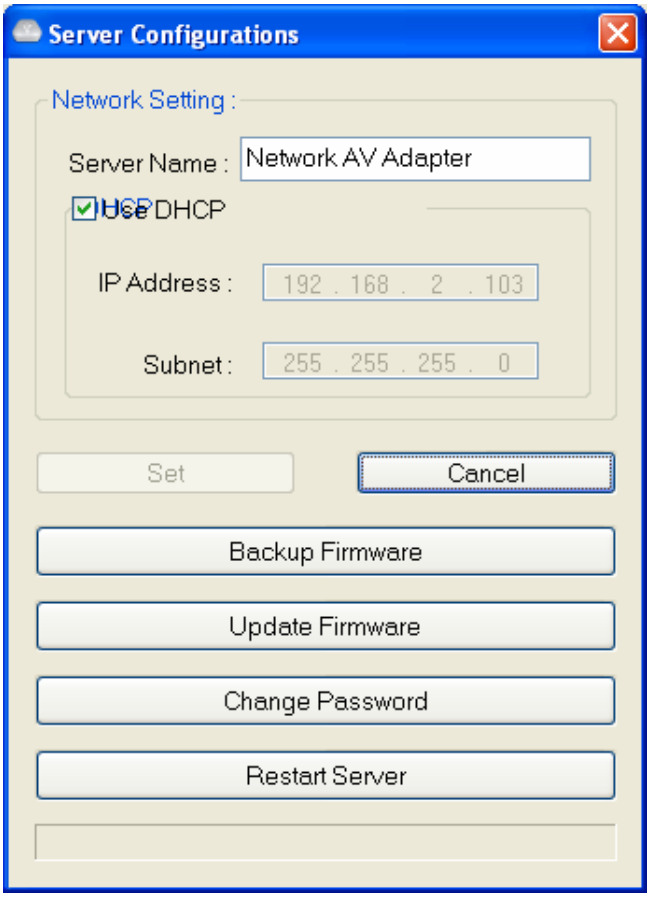

Server Name: This field allows you change the Server name. Change it whatever you want.

USE DHCP: When this field is checked, your server acquires IP address automatically. Uncheck it and you can enter IP address automatically.

Note: You can apply this function to a server under different network segment. HOWEVER, some router/switch hub does not allow communication between servers under different segment. In this case, you won't even see the server on a different network segment.

Backup Firmware: this function is a fail-save mechanism for the Update Firmware function. Just browse to where you want to save the backup file and click on **Save** to save the file.

Update Firmware: update firmware with this function. Use the **Browse** button to choose the firmware to update. Click on **Open** to start.

Change Password: Simply enter the new password and enter it again for confirmation. Click on **Submit** to change.

Reset Server: This button reboots the server. Please note that this function will not work if the server you attempt to reset has a device connected to it and the device is occupied by a user.

3. Open Web Page

To bring up the server's configuration web pages.

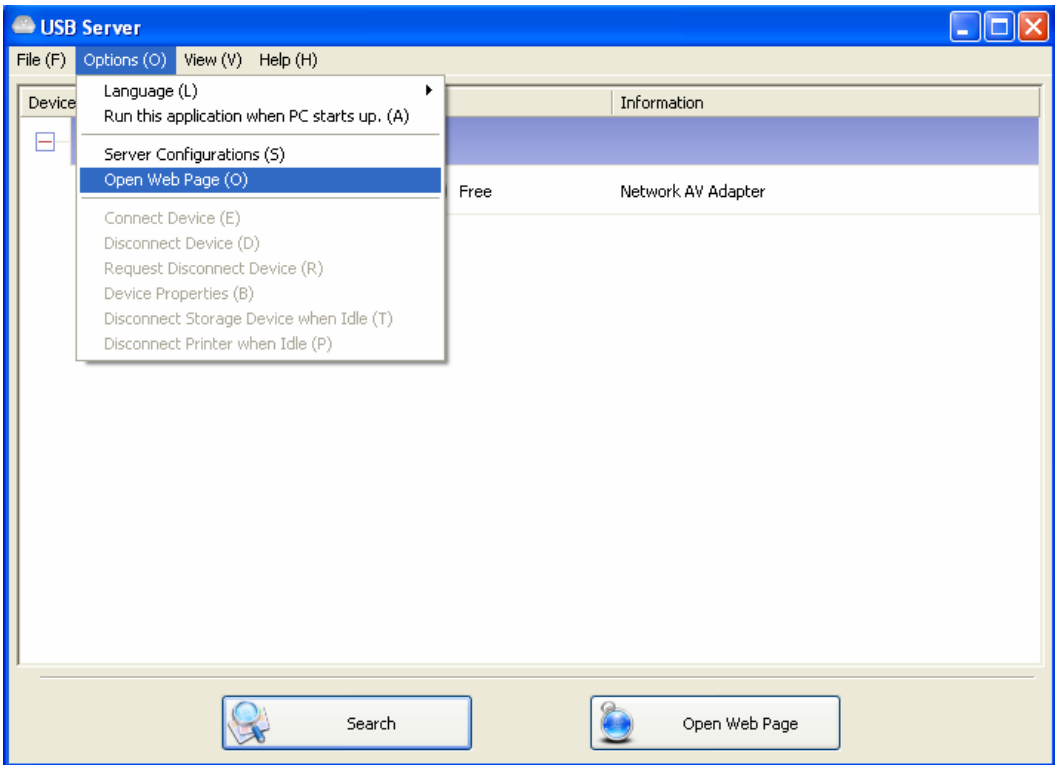

Status: This is the main page. You can see the important information about the EST USB Server and the devices connected to it. The 4 links at the left-hand side take you to different pages with other information about this server or functions you could perform.

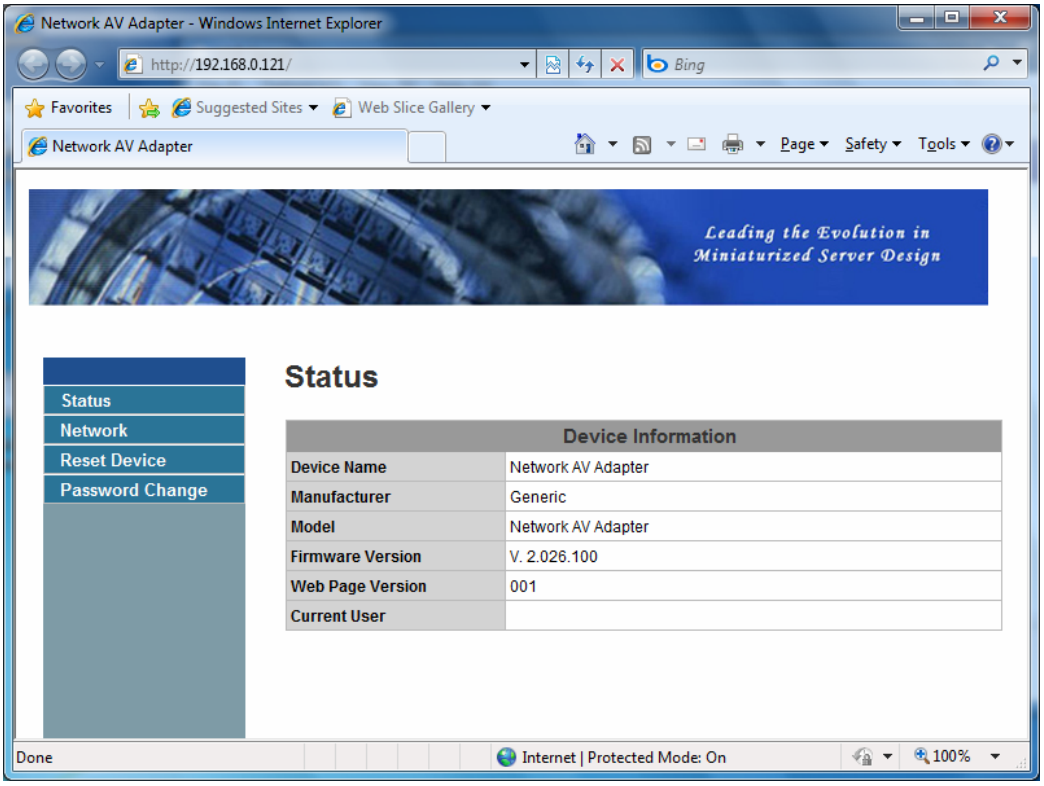

Network Information: This page displays the current network setting of the server, like the current IP setting and the MAC address.

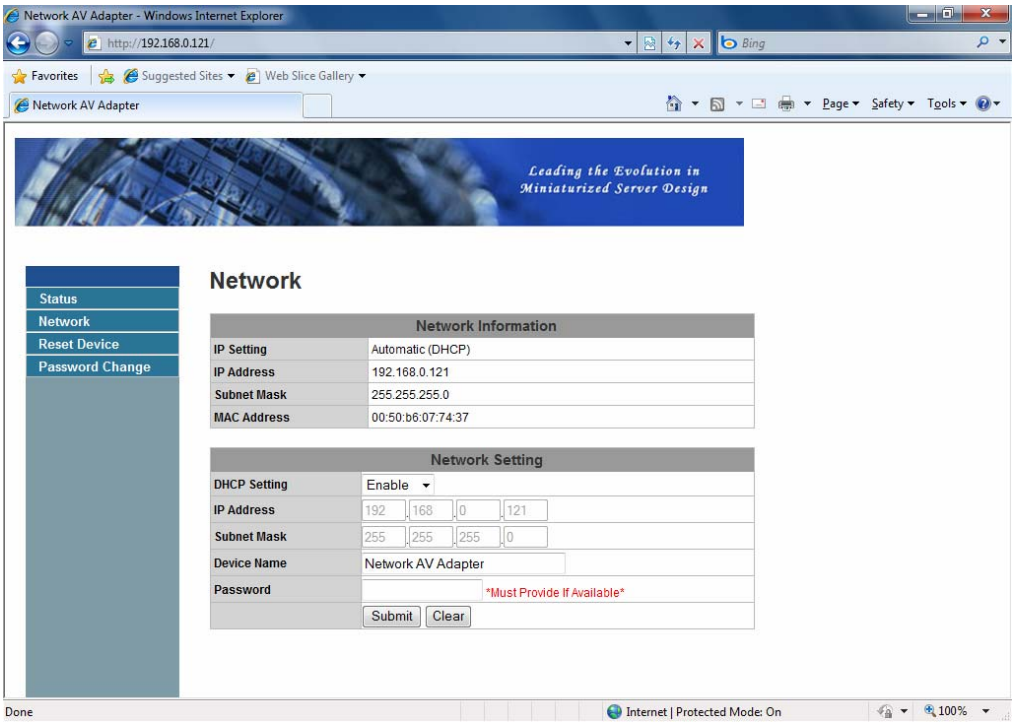

Reset Device: Click on the Submit button with the correct password provided will reboot this EST USB Server. If no password has been set, then simply click on Submit button to perform this function.

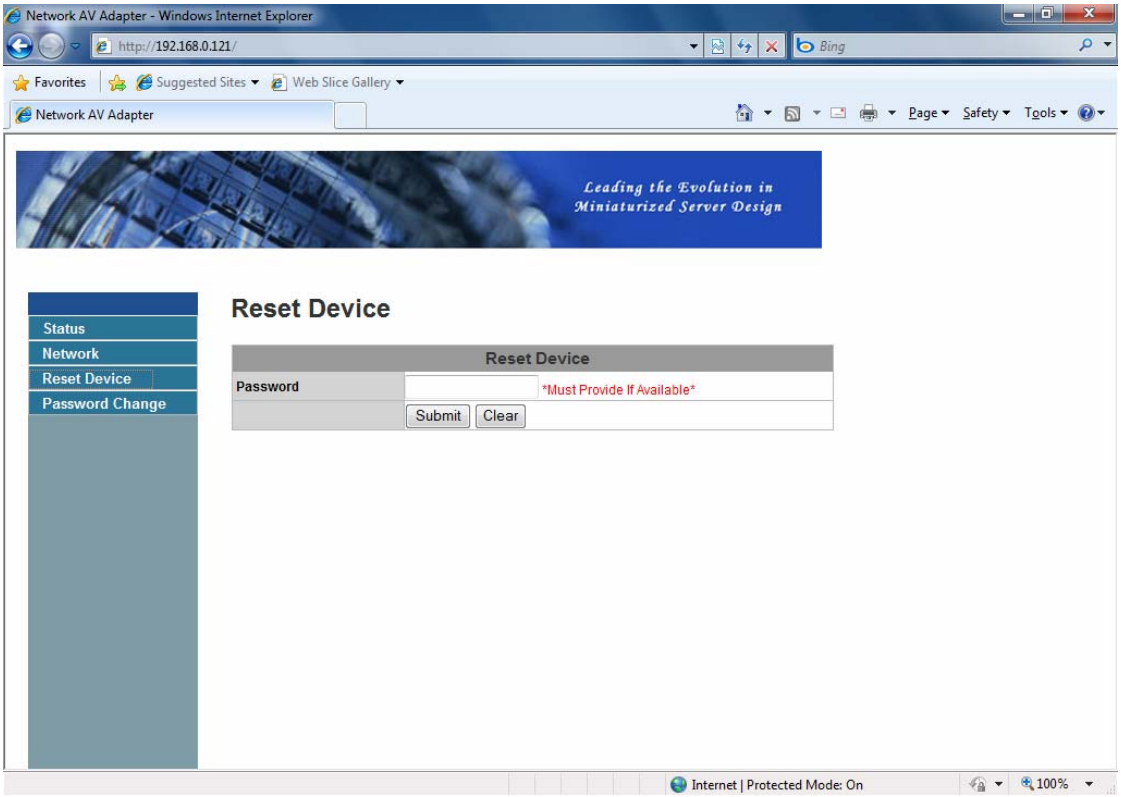

Change Password: To change the password, you must enter current password, enter new password and enter it again for confirmation and the click on Submit to set the new Password. If you are setting the password for the first time, you do not have to provide current password.

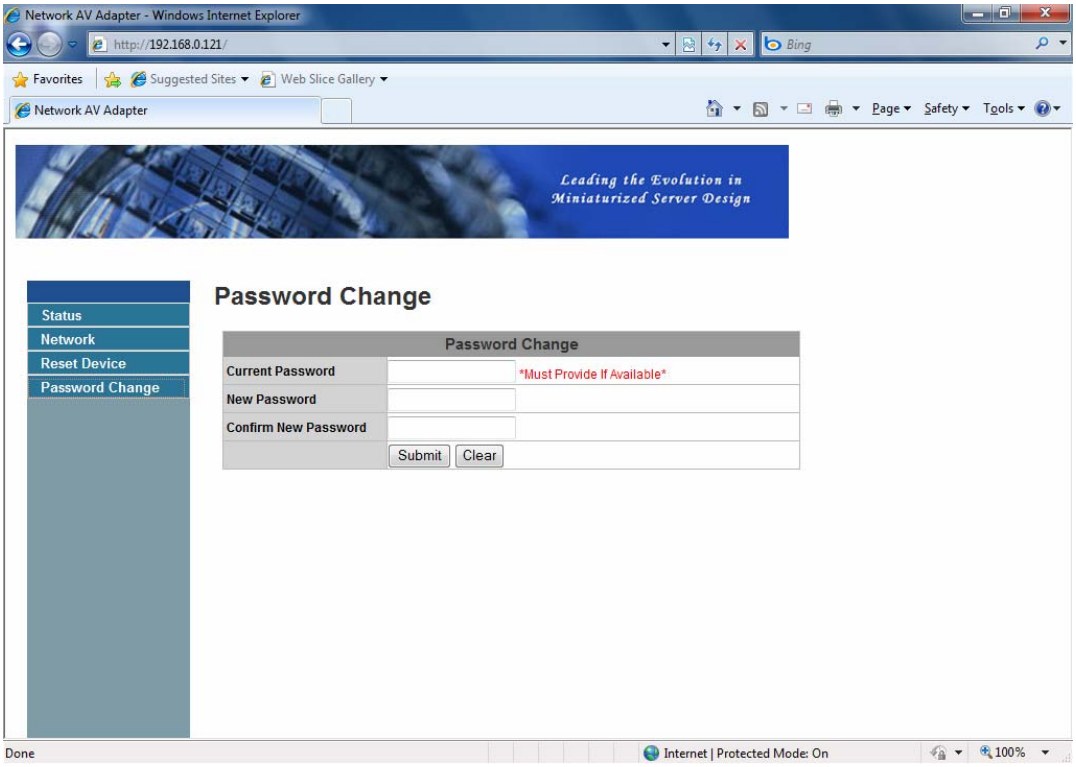

■ View

The tree view in the main dialog has two display modes: "Servers and Devices" mode and "Devices Only" mode. The default setting is "Devices Only" mode. You can toggle between these two display modes with the View option on the control menu.

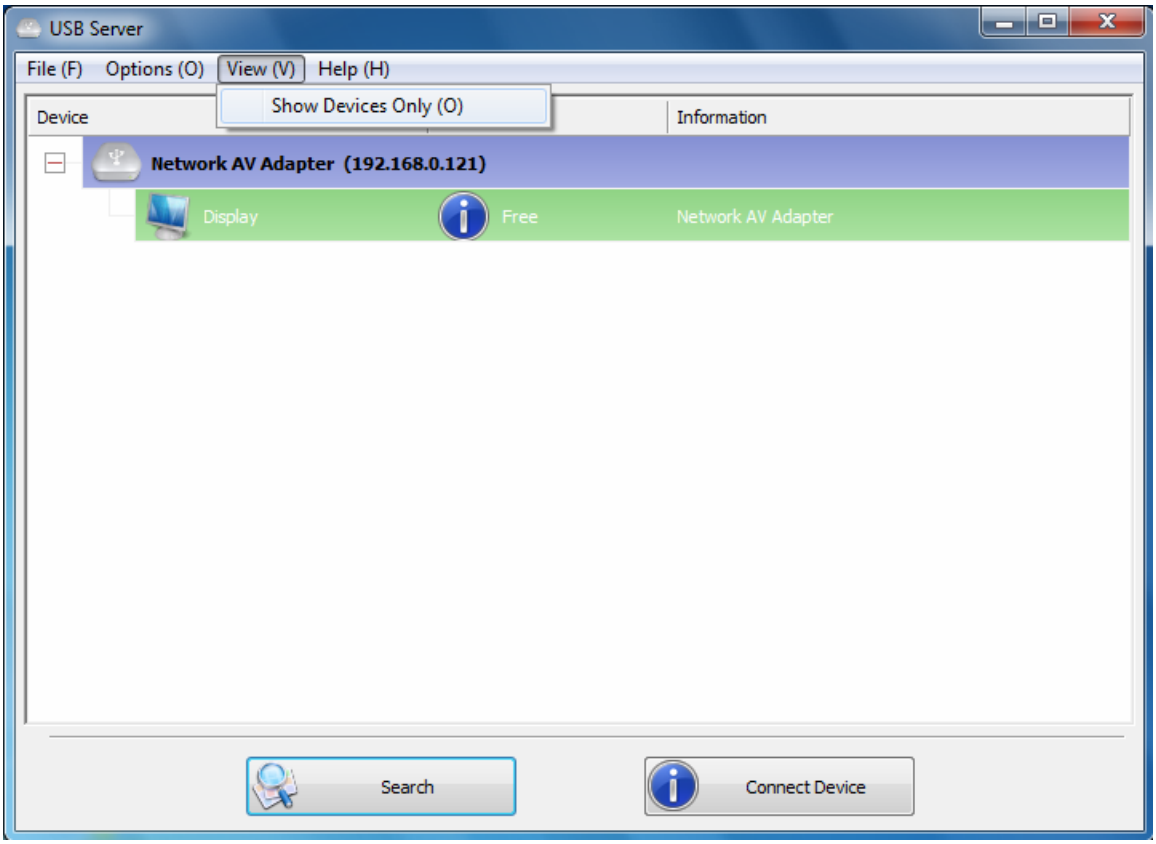

■ Help

1. **About:** Bring up a dialog box with legal and other relative information displayed.

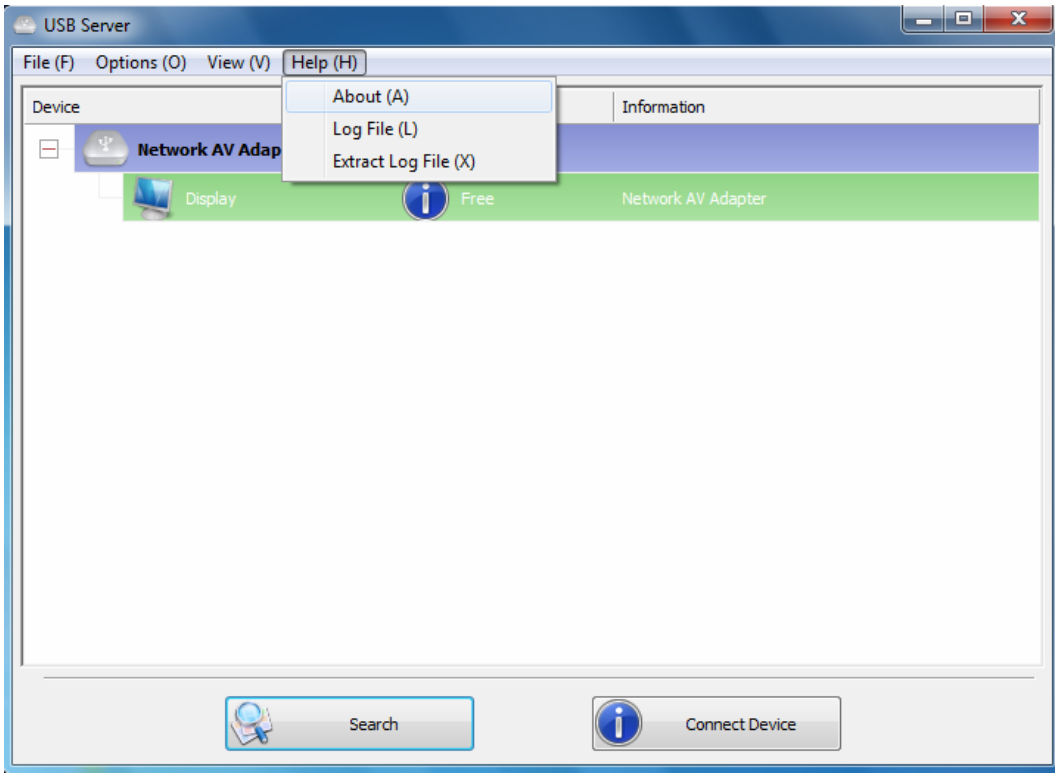

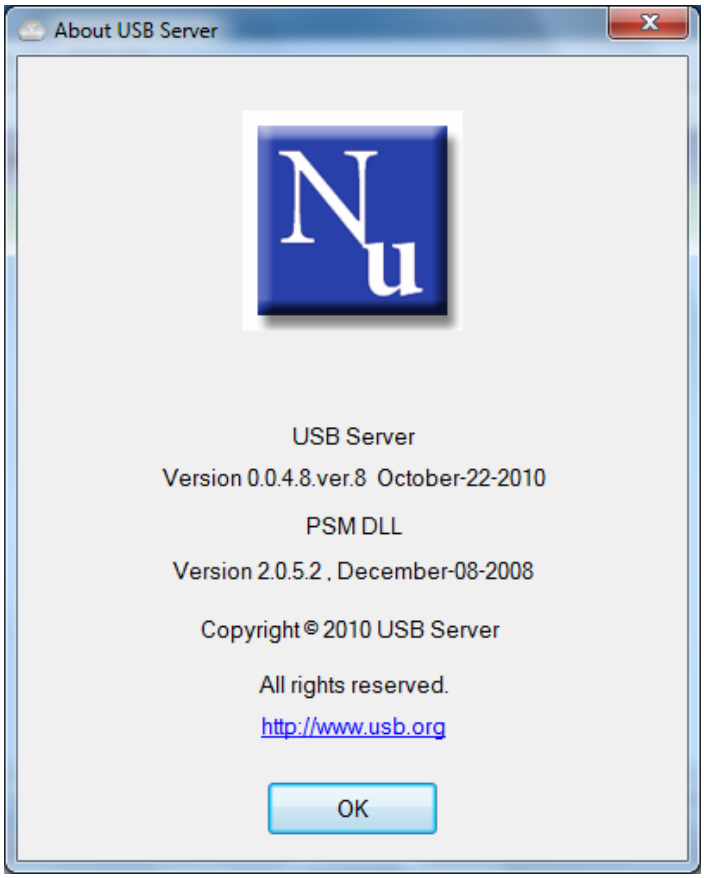

2. **Log File:** Enabling Log function allows the USB Server software to generate a log file that records data which might help software developers debug a problem. So if you want to report a bug, enable this function and repeat the steps to reproduce the bug. Once you have seen the bug happen again, you can use the Extract log file function to extract the file and send the file in for analysis.

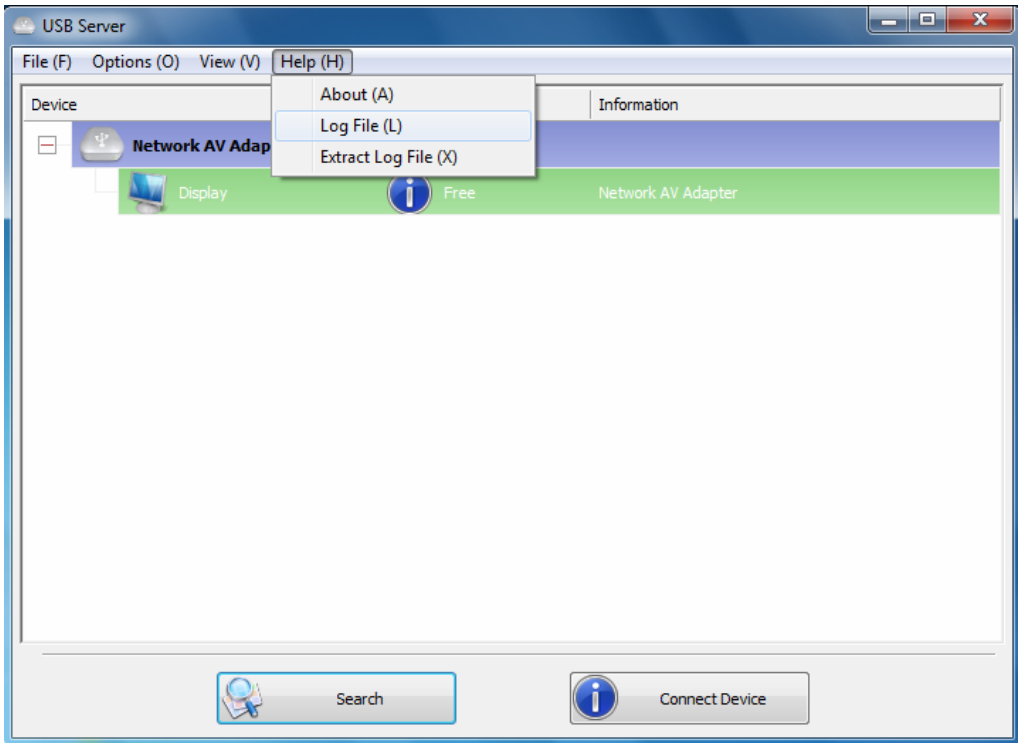

3. **Extract Log File:** Clicking on this option brings up the folder where the log file is kept.

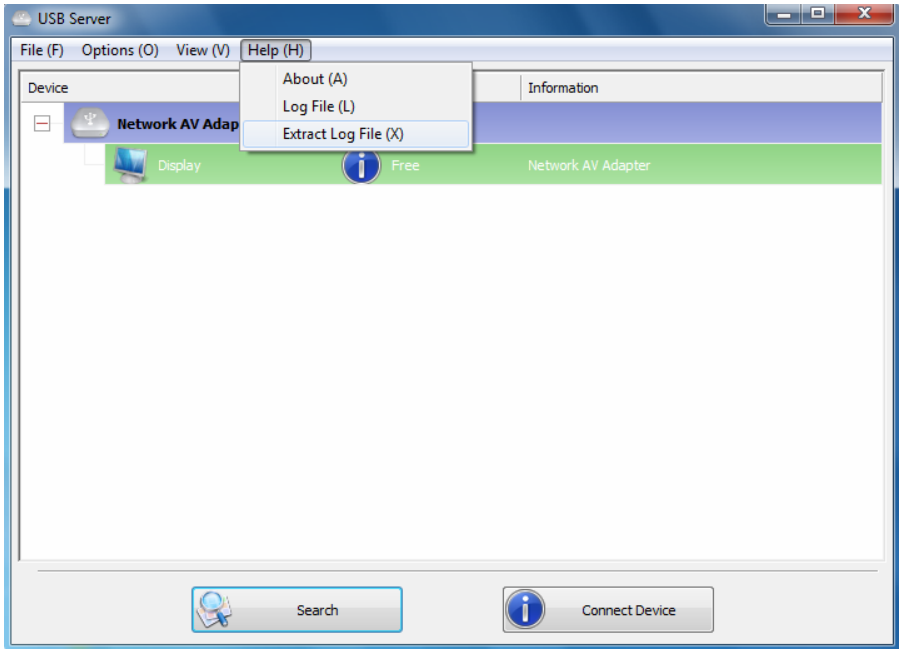

4. Display Mode

On Windows® XP/ Windows Vista®

To change the display mode, please right-click on your desktop and click **Properties** > **Settings** on Windows® XP, **Personalize** > **Display Setting** on Windows Vista® or use the icon in the system tray that looks like a monitor as below.

The USB-attached monitor can be configured to:

- Extend your Windows desktop (default)
- Extend your Windows desktop to Right / Left / Above / Below
- Mirror your Windows desktop
- Set as Main Monitor
- Notebook Monitor Off
- Off

On Windows® XP

On Windows Vista®

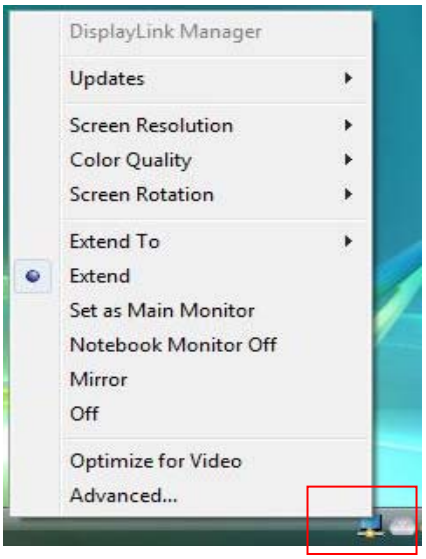

On Windows® 7

1. You can change the appearance of your displays through the Window. Moreover, additional controls are available in Windows® 7: Orientation (Portrait, landscape, rotated portrait, rotated landscape)

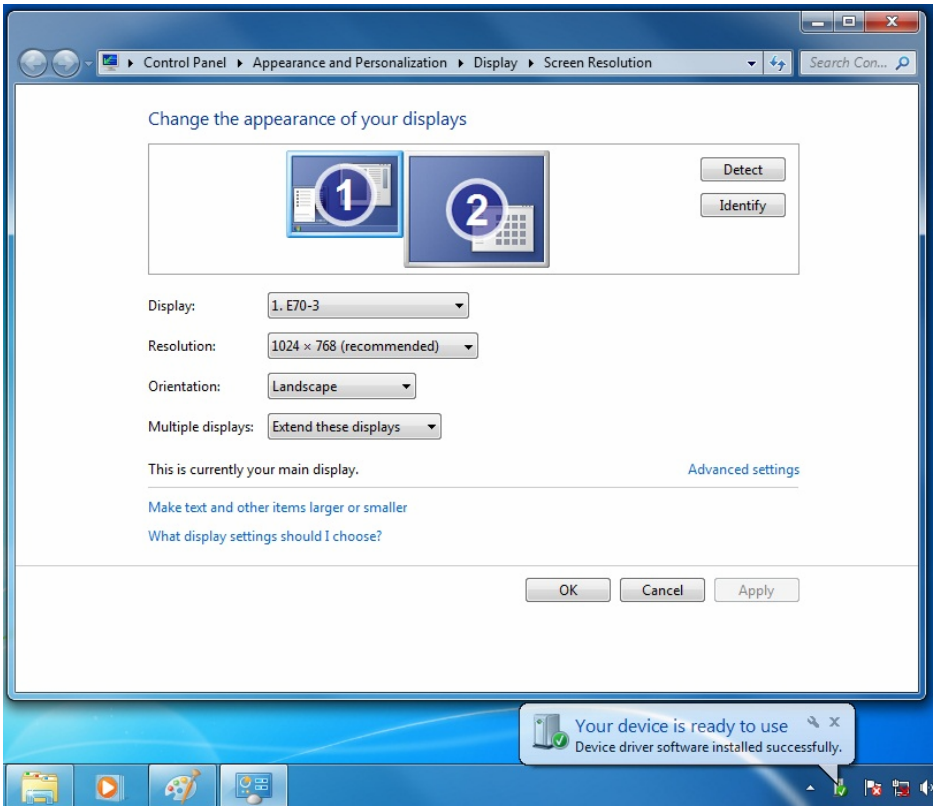

2. To control the behavior of an attached DisplayLink device (or screen), it is possible to use **Windows Key+P** to display menu (and cycle through it) to allow: Disconnect Projector, Duplicate, Extend, Projector Only.

5. Uninstall the Driver

If for any reason you want to uninstall the driver, please take these steps:

Uninstall the DisplayLink Driver

1. Open the **Control Panel** and double-click **Uninstall a Program** on Windows® 7, **Programs and Features** on Windows Vista®, and **Add or Remove Programs** on Windows® XP.
2. Select DisplayLink Graphics and click Uninstall or Remove.

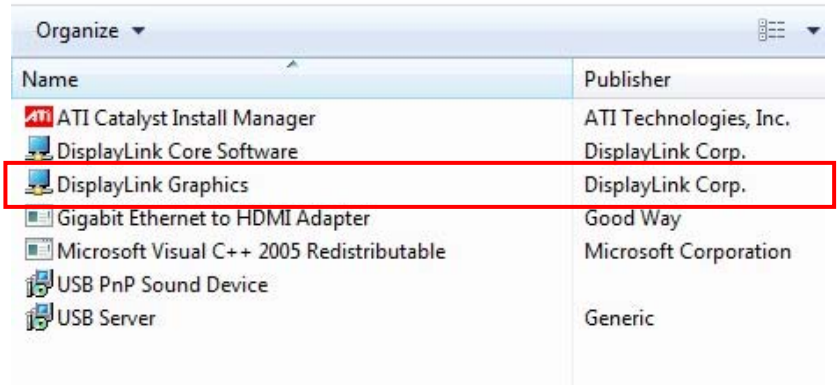

3. Click **Yes** to confirm the removal. During the removal process a couple of DOS windows will pop up.

Programs and Features
Are you sure you want to uninstall DisplayLink Graphics?
In the future, do not show me this dialog box
Yes
No

4. Click **Yes** to restart your computer and then unplug the adapter now.

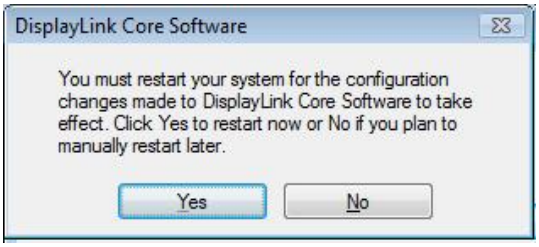
DisplayLink Core Software
You must restart your system for the configuration changes made to DisplayLink Core Software to take effect. Click Yes to restart now or No if you plan to manually restart later.
Yes
No

Uninstall PnP Sound Driver

1. Open the **Control Panel** and double-click **Uninstall a Program** on Windows® 7, **Programs and Features** on Windows Vista®, and **Add or Remove Programs** on Windows® XP.
2. Select USB PnP Sound Device and click Uninstall or Remove.

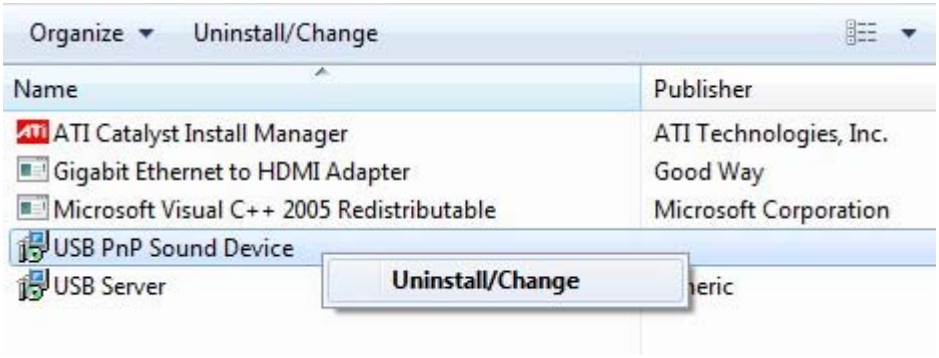

3. Please select **Yes, I want to restart my computer now**.

USB PnP Sound Device
USB PnP Sound Device driver successfully uninstalled.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Finish

Uninstall USB Server Driver

1. Open the **Control Panel** and double-click **Uninstall a Program** on Windows® 7, **Programs and Features** on Windows Vista®, and **Add or Remove Programs** on Windows® XP.
2. Select USB Server and click Uninstall or Remove.

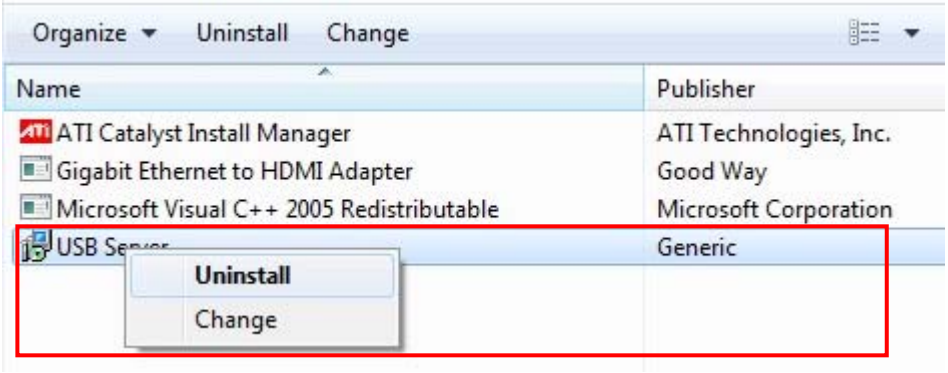

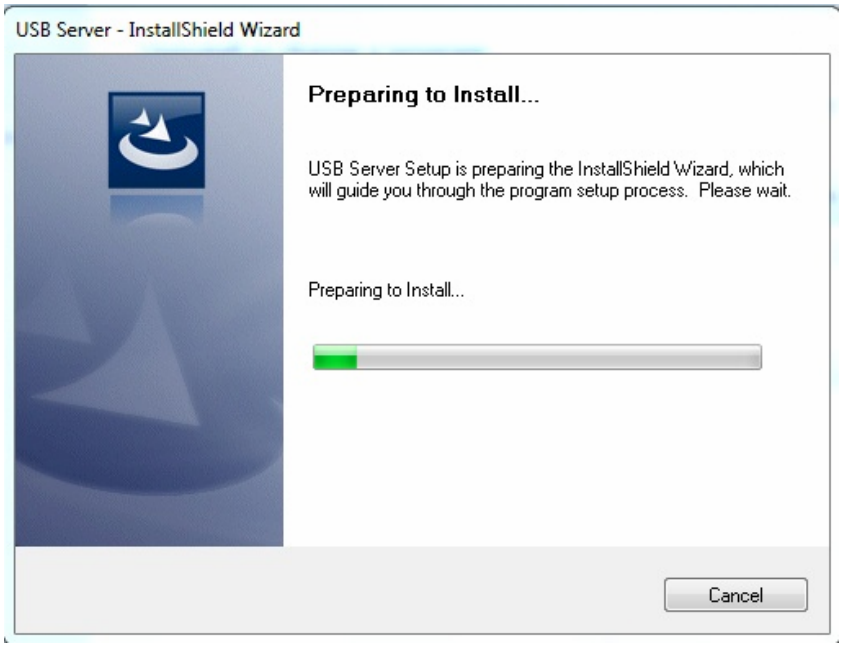
USB Server - InstallShield Wizard
Preparing to Install...
USB Server Setup is preparing the InstallShield Wizard, which will guide you through the program setup process. Please wait.
Preparing to Install...
Cancel

3. Click **Yes** to completely remove the selected application and all of its features.

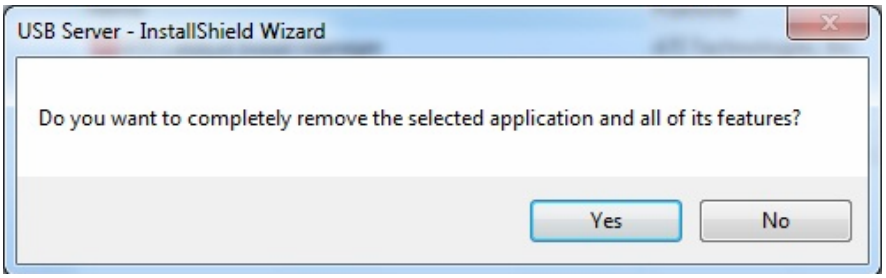
USB Server - InstallShield Wizard
Do you want to completely remove the selected application and all of its features?
Yes
No

4. Click **Finish** to exit the wizard.

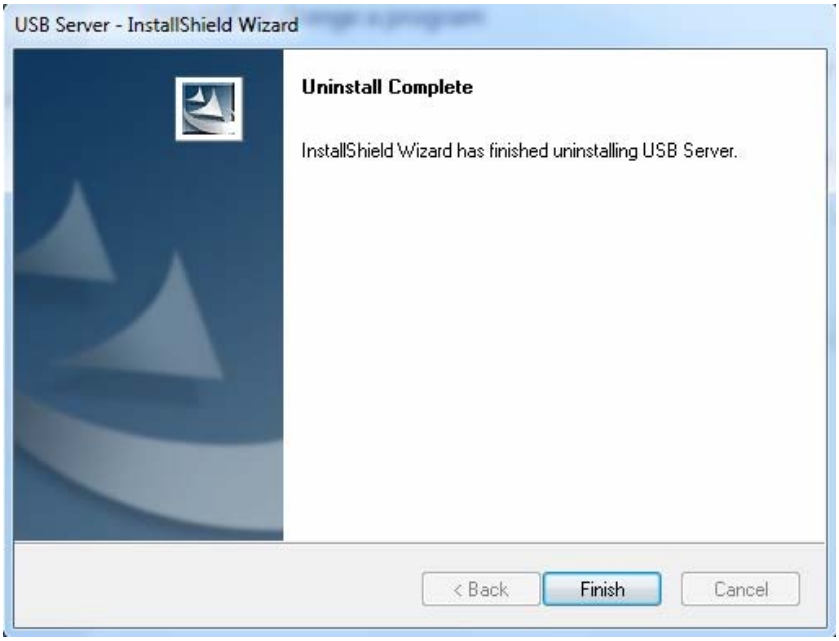

5. Select "**Yes, I want to restart my computer now**" and click **Finish**.

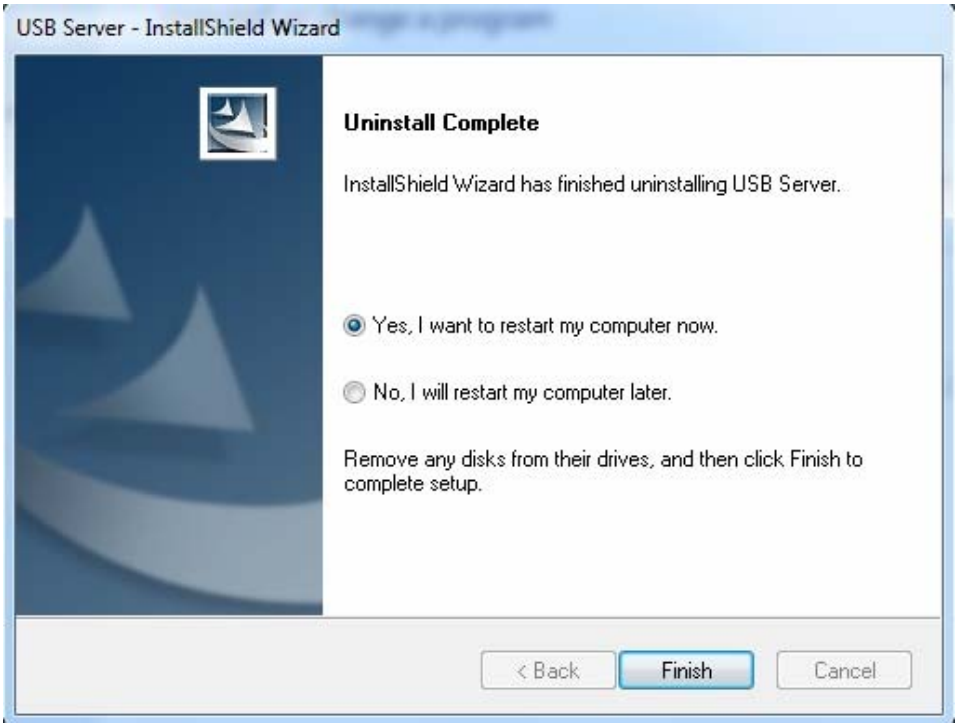
USB Server - InstallShield Wizard
Uninstall Complete
InstallShield Wizard has finished uninstalling USB Server.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Remove any disks from their drives, and then click Finish to complete setup.
< Back
Finish
Cancel

6. Specifications

Function	**Gigabit Ethernet to HDMI® Adapter**	
Connector	Gigabit Ethernet port	1 xRJ45 Female
	USB Downstream Port	2 xUSB A type Female
	Video out	1 x HDMI®
	Power	1 x DC Jack(Black)
LED	Power LED	1x LED (Green)
	Link LED	1x LED (Blue)
Video	Video Resolution	1080 P
Power Consumption	Operating Power : 900mA	
	Suspend Mode Power : 810mA	
Physical Properties	Housing	Plastic (ABS + PC)
	Weight	230g
	Dimension	66.9mm(L)x30mm(W)x142.05mm(H)

7. Regulatory Compliance

FCC Conditions

This equipment has been tested and found to comply with Part 15 Class B of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference

(2) This device must accept any interference received. Including interference that may cause undesired operation.

CE

This equipment is in compliance with the requirements of the following regulations: EN 55 022: EMC Directive 2004/08/EC (EN55022/EN55024)

WEEE Information

For EU (European Union) member users:
According to the WEEE (Waste electrical and electronic equipment) Directive, do not dispose of this product as household waste or commercial waste. Waste electrical and electronic equipment should be appropriately collected and recycled as required by practices established for your country. For information on recycling of this product, please contact your local authorities, your household waste disposal service or the shop where you purchased the product.